


1



2

Make loop of the strap and lead it through the buckle as shown.

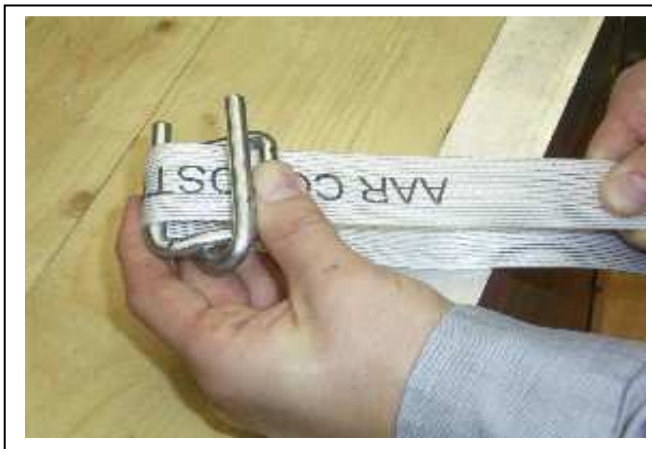


3

Pull the top strap with your right hand to make it hand tight.



4

Make a new loop and lead it through the other side of the buckle.

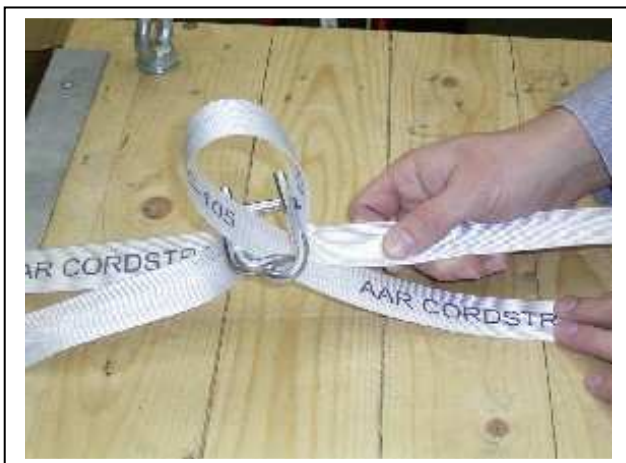

5

Place left hand on bottom strap and pull the top strap with your right hand to make it hand tight.



6

Squeeze tensioner handle to trigger the gripper foot and place the tensioner on the below strap, approximately 30 cm away from the buckle. Feed top strap through knife assembly.




7

Tension the strap by pushing the button on the grip.



8

Upon completing squeeze the handle so cutting and releasing the strap. Move the tensioner away to the right.

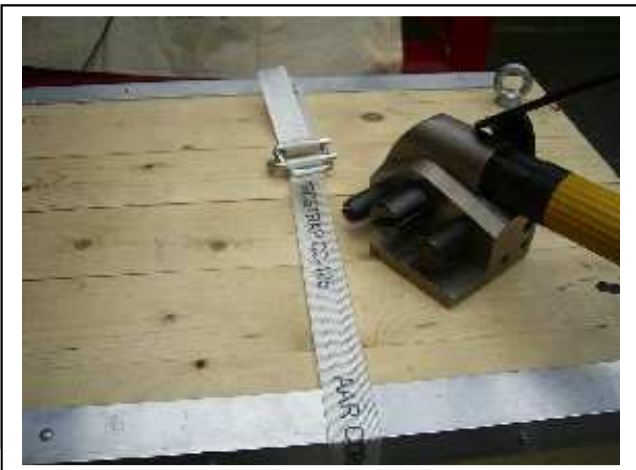

9